
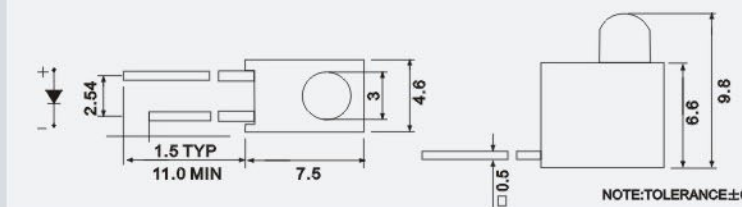

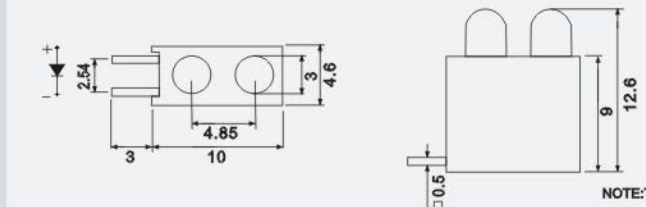

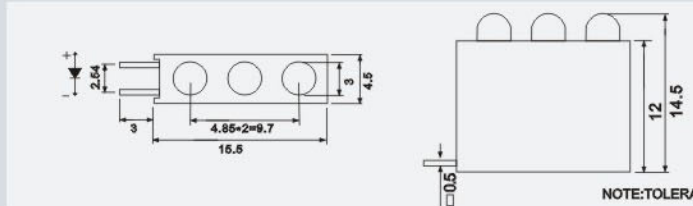


Φ3 CIRCUIT BOARD INDICATORS.

Part Number	Emitting Color	VF(v)IF=20mA Typ-Max	Lens-color	Wave Length (nm)	Luminous Intensity IF=20mA(mcd) Min~Typ	View Angle
 <div style="float: right; text-align: right;">  <p>Fig:U-1</p> <p>NOTE:TOLERANCE±0.5mm Unit:mm</p> </div>						
3UR4HD1	● RED	1.70-1.95	D.	642-645	45.0-65.0	40
3UR4ST1	● RED	1.70-1.95	T.	642-645	200-220	20
3UYG4HD1	● YELLOW GREEN	2.00-2.40	D	568-573	40.0-60.0	40
3UYG4HT1	● YELLOW GREEN	2.00-2.40	T	568-573	180-200	20
3UY4HD1	● YELLOW	1.90-2.40	D	585-590	60.0-80.0	40
3UY4HT1	● YELLOW	1.90-2.40	T	585-590	150-200	20
3UO4HD1	● ORANGE	1.90-2.40	D	600-610	45.0-65.0	40
 <div style="float: right; text-align: right;">  <p>Fig:U-2</p> <p>NOTE:TOLERANCE±0.5mm Unit:mm</p> </div>						
3UR4HD2	● RED	1.70-1.95	D.	642-645	45.0-65.0	40
3UR4ST2	● RED	1.70-1.95	T.	642-645	200-220	20
3UYG4HD2	● YELLOW GREEN	2.00-2.40	D.	568-573	40.0-60.0	40
3UYG4HT2	● YELLOW GREEN	2.00-2.40	T.	568-573	180-200	20
3UY4HD2	● YELLOW	1.90-2.40	D.	585-590	60.0-80.0	40
3UY4HT2	● YELLOW	1.90-2.40	T.	585-590	150-200	20
3UO4HD2	● ORANGE	1.90-2.40	D.	600-610	45.0-65.0	40
 <div style="float: right; text-align: right;">  <p>Fig:U-3</p> <p>NOTE:TOLERANCE±0.5mm Unit:mm</p> </div>						
3UR4HD3	● RED	1.70-1.95	D.	642-645	45.0-65.0	40
3UR4ST3	● RED	1.70-1.95	T.	642-645	200-220	20
3UYGHD3	● YELLOW GREEN	2.00-2.40	D.	568-573	40.0-60.0	40
3UYG3HT3	● YELLOW GREEN	2.00-2.40	T.	568-573	180-200	20
3UY4HD3	● YELLOW	1.90-2.40	D.	585-590	60.0-80.0	40
3UY4HT3	● YELLOW	1.90-2.40	T.	585-590	150-200	20
3U4HD3	● ORANGE	1.90-2.40	D.	600-610	45.0-65.0	40